



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> :		A2	(11) International Publication Number: <b>WO 00/02114</b>
G06F 1/00, 13/00, H04L 9/00, 29/06, 12/56, G06F 9/46			(43) International Publication Date: 13 January 2000 (13.01.00)
(21) International Application Number: PCT/SE99/01202		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 2 July 1999 (02.07.99)			
(30) Priority Data: 9802415-1 2 July 1998 (02.07.98) SE			
(71) Applicant (for all designated States except US): EFFNET GROUP AB [SE/SE]; Gustavslundsvägen 151 B, S-167 51 Bromma (SE).			
(72) Inventors; and		Published	
(75) Inventors/Applicants (for US only): SUNDSTRÖM, Mikael [SE/SE]; Södra Kungsgatan 24, S-972 35 Luleå (SE). JOHANSSON, Olof [US/US]; 10 B Queen Circle, Newark, DE 19702 (US). LINDHOLM, Joel [SE/SE]; Kårhusvägen 5:407, S-977 54 Luleå (SE). BRODNIK, Andrej [SI/SI]; Gotska 6, 1000 Ljubljana (SI). CARLSSON, Svante [SE/SE]; Gnejsstigen 4, S-977 53 Luleå (SE).		Without international search report and to be republished upon receipt of that report.	
(74) Agents: PETRI, Stellan et al.; Ström & Gulliksson AB, P.O. Box 4188, S-203 13 Malmö (SE).			
(54) Title: FIREWALL APPARATUS AND METHOD OF CONTROLLING NETWORK DATA PACKET TRAFFIC BETWEEN INTERNAL AND EXTERNAL NETWORKS			
(57) Abstract			
<p>A firewall (3) for controlling network data packet traffic between internal and external networks (1, 5, 4), comprising filtering means selecting from a total set of rules, in dependence of the contents in data fields of a data packet being transmitted between said networks, a rule applicable to the data packet, in order to block said packet or forward said packet through the firewall (3). A 2-dimensional address lookup means (8) performs a 2-dimensional lookup of the source and destination addresses of the packet in a set of address prefixes, each prefix having a subset of rules of the total set of rules, in order to find a prefix, via its representation, associated with said source and destination addresses, and rule matching means (10) for rule matching, on the basis of the contents of said data fields, in order to find the rule applicable to the data packet.</p>			

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Larvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav	TM	Turkmenistan
BF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

**TITLE: FIREWALL APPARATUS AND METHOD OF CONTROLLING NETWORK DATA PACKET TRAFFIC BETWEEN INTERNAL AND EXTERNAL NETWORKS**

5

**Field of the Invention**

The present invention relates generally to a firewall apparatus and a method of controlling network data packet traffic between internal and external networks, and more particularly to a firewall apparatus comprising filtering means for selecting from a total set of rules, depending on the contents in data fields of a data packet to be transmitted between said networks, a rule applicable to the data packet, in order to block said packet or forwarded the packet through the firewall, and a method thereof.

**Description of the Prior Art**

An important issue for most Internet connected organisations is security and consequently firewalls are becoming an important part in most computer and network security strategies in most organisations. Users accessing the webserver or other public services of the organisation must not be able to gain access to internal services such as accounting systems, Internet information servers and other possibly sensitive company information. The service of the systems must not be interrupted - servers and workstations need to be protected against denial-of-service (DOS) tags from users on the Internet.

A firewall, or filtering router, is a device that works basically the same way as a router. That is, it receives packets on an in-interface, inspects the packets destination address, and forwards the packet on the correct (with respect to the destination address) out-interface. However, a firewall performs a much more thorough inspection of each packet. The source and destination

address, source and destination ports, protocol field, flags, and options are also inspected and compared to a list of firewall rules. Depending on which rule matches the packet, the firewall might decide not to forward the 5 packet, for instance if a blocking rule is matched.

In addition to unauthorized access there are other threats that arise when an organisation is connected to the Internet. The bottom line is that data received from unknown sources cannot be trusted. Scanning for viruses and 10 trojan horses in email and webpages are duties performed by some prior art firewalls.

Further, as network bandwidth is increasing, the performance of the firewalls are becoming an important 15 issue.

Firewalls can work on many different levels and 15 provide different kind of functionality for scanning data passing it. However, the basic functionality of all firewalls is to implement filtering based on the contents of the network (IP=Internet Protocol) and transport (UDP, 20 TCP=Transmission Control Protocol and ICMP=Internet Control Message Protocol) layer headers. Without such IP filtering all other functionality, such as data scanning, is useless, that is users on the internal network might just as well configure their network applications not to go 25 through the scanner to connect to remote servers and thus bypass all security functionality.

Companies or organisations are connected to the Internet for different reasons, for example in order to 30 publish information about a company, its products and services on the web, get access to information available on the Internet, and correspond via email.

The company often has internal information that users on the Internet must not be able to access, such as 35 Internet information servers, file servers etc. The most common configuration is to allow connections from the

Internet to a set of servers (web, email, and other public services), but to deny access to other hosts (for example intranet servers). To achieve this a "demilitarised zone" (DMZ) is established. Connections to computers in the DMZ 5 can be made from the Internet as well as from the intranet, but access to the intranet from the Internet is restricted. In prior art networks an internal network, such as an intranet is connected to the demilitarised zone via a firewall and the DMZ is connected to the Internet via a 10 router. Consequently, network traffic can pass freely between the Internet and the DMZ, which is completely unprotected from users on the intranet. A reason for this is that prior art firewalls also lack the possibility to connect more than two networks - an internal and an 15 external network.

Other firewalls have three network interfaces. Here, restrictions can be made concerning traffic between the Internet and the DMZ as well as the intranet. Some restrictions are made for traffic to and from hosts in the DMZ, 20 for example the web server only needs to be accessible on the HTTP (Hypertext Transfer Protocol) port. Internet users should not be able to connect to any other services. However, users on the intranet might want to be able to access the web server in more ways than the Internet users 25 for administrative purposes, thus more access should be granted in between these two networks. Similar rules are needed for the email server; SMTP (Simple Mail Transfer Protocol) connections should be allowed from the Internet, but reading email should only be possible for certain 30 allowed hosts on the intranet, and possibly also from some host on the Internet.

In a firewall environment the number of machines in the DMZ is for example 30. The rules for the machines in the DMZ can be different for each machine, but the number 35 of rules per machine is fairly low, for example 10-15. More

rules might apply for traffic from the intranet to the DMZ, but these are likely to be more general. Thus, a fairly low number of rules are valid for all machines in the DMZ.

Further, rules regarding traffic between the Internet and the intranet(s) are in most cases few, if any at all. 5 Most traffic should be blocked. However, traffic initiated from the intranet might be allowed.

As the number of users on the Internet grows, the public servers will be visited more frequently, causing 10 more traffic. The traffic to and from the intranet increases as the intranet users are taking part of the increasing amounts of information available on the Internet. Consequently, bandwidth requirements is increasing. This puts greater demands on the performance of 15 the firewalls used.

Thus, the main task for a firewall is packet filtering, that is given an IP packet and a set of rules, which rule should be applied on this packet? If several rules match the same packet a policy needs to be defined to 20 specify which rule to pick. There are two prior art solutions known to this problem. One solution is to pick the rule matching the most number of fields of a packet, and if two rules match the same number of fields, but different ones, an order needs to be specified between 25 them. This is used in the packet classification algorithm by Borg and Flodin, Borg, N. Flodin, Malin, packet classification, June 1997; Borg, N., A Packet Classifier for IP Networks, Masters Lic., Luleå University of Technology, February 1998. Another solution is to define an 30 order between the rules and use that order to define which rule to pick. An advantage of the second solution is that it gives better flexibility when defining filter rules, and the NetBSD firewall code utilises this method.

A filter rule comprises a set of criteria that has to 35 be fulfilled, and an action to perform when they are

fulfilled. The criteria are based on IP source and destination addresses (32-bit prefixes), IP protocol field (8 bit-integer), whether or not the packet has IP options set, and what these options are (integer) due IP/TCP source and destination port numbers (2 16-bit integer ranges), TCP header flags (3 bits), ICMP header type and code fields (2 8-bit integers), what interface the packet was read from (8 +8 bits), and what interface the packet is to be forwarded to (8 + 8 bits).

Most firewalls today do not address the rule matching problem in particular. It is common to have a linked list (or an array) of rules, comparing the packet with each and every one of these until a match is found. However, this is not efficient. Another approach is hashing of the rules. Further, if the method for resolving ambiguities among the rules, that is two rules match the same packet, most implementations solve the problem by defining the first or last matching rule as the one to follow.

A prior art firewall, PIX firewall by Cisco Systems, is a connection oriented security device that protects an internal network from an external network. The PIX firewall is a very expensive device and it has an upper limit of about 16000 simultaneous connections. The main part of the PIX firewall is a protection scheme based on the adaptive security algorithm (ASA), which offers stateful connection oriented security. ASA tracks the source and destination address, TCP sequence numbers, port numbers, and additional TCP flags of each packet. This information is stored in a table, and all inbound and outbound packets are compared against entries in the table. Hence, information of each connection established has to be stored during the lifetime of the connection, and thus, the number of connections possible are defined by the memory capacity available. A fully loaded Cisco PIX firewall can operate at about 90 Mbite/s. However, the Cisco PIX firewall also supports port

WO 00/02114

address translation (PAT), whereby more than 64000 internal hosts can be served by a single external IP address.

A prior art packet filter called ipf (IP filter) is included with the standard distribution of net BSD 1.3.

5 The rule sets in ipf are split up on the interfaces on which they are valid. Furthermore, the rules are checked twice, first when the packet enters the host and second when it leaves the host. Rules only valid for inbound packets are not added to the list of rules checked at the 10 output port, and vice versa. The data structure is basically an optimised linked list.

10 The Exokernel, Engler, D., Kaashoek, M. F., O'Tool Jr, J., Exokernel: An operating system architecture..., Proceedings of the 15th ACM symposium on Operating Systems principles, December 1995, uses a different approach to 15 handle packet demultiplexing called DPF, Angler, D., Kaashoek, M. F., DPF: Fast, flexible message demultiplexing..., Engler, D., Kaashoek, M. F., Computer Communication Review, Vo. 26, No. 4, October 1996. The 20 rules are written in a special programming language, and thereafter, the are compiled. The compiler knows about all the rules specified, the generated code can be optimised for the expected traffic patterns.

25 **Summary of the Invention**

It is an objective of the present invention to provide an improved firewall apparatus and a method of controlling network traffic between internal and external networks providing an efficient address lookup and rule 30 matching process in order to achieve an effective and fast IP packet filtering, and an unlimited number of possible connections through the firewall.

This is accomplished by the firewall apparatus and method according to the invention, wherein the set of rules 35 needed to be searched linearly is reduced by segmenting the

rule set. The firewall according to the invention comprises 2-dimensional address lockup means performing a two step lookup, first of source and destination addresses of the packet in a set of address prefixes. Each prefix is 5 associated with a subset of rules of a total set of rules. A liner search is performed on the resulting subset of rules in order to find the rule applicable to the present data packet.

Another object of the invention is to provide a 10 fragment machine enabling filtering of all fragments in a fragmented packet.

Still another object of the invention is to provide network address translation means translating internal 15 source addresses to external source addresses of a packet transmitted from the firewall or external source addresses to internal source addresses of a packet transmitted into the firewall.

Another further object of the invention is to provide network address translation means translating internal 20 source addresses to external source addresses of a packet transmitted from an internal network to an external network, or external source addresses to internal source addresses of a packet transmitted from the external network to the internal network.

Still another object of the invention is to provide 25 hole punching means performing a temporary exception from an external-to-internal blocking rule for a connection initiated from the internal network, wherein a returned channel for packets transmitted from the external network 30 to the internal network are established through the firewall.

A further object of the invention is to provide a firewall capable of handling at least 1000 unique rules.

Advantageous of the firewall and the method thereof 35 according to the present invention are the unlimited number

of possible simultaneous connections, the fast IP filtering, and the great number of possible rules supported.

Another object of the firewall according to the invention is to provide a firewall comprising a router.

#### **Brief Description of the Drawings**

In order to explain the invention in more detail and the advantages and features of the invention preferred embodiments will be described in detail below, reference being made to the accompanying drawings, in which

FIG 1 is shows common network topology comprising the firewall according to the invention,

FIG 2 is a block diagram of the firewall according to the invention,

FIG 3 is an illustrative view of a partition of a two dimensional dense chunk,

FIG 4 is an illustrative view of the data structure according to the invention,

FIG 5 is an illustrative view of a class (0,0) tile,

FIG 6 is an illustrative view of a class (1,1) tile,

FIG 7 is an illustrative view of a class (1,2) tile,

FIG 8 is an illustrative view of a class (2,1) tile,

FIG 9 is an illustrative view of a class (1,3+) tile,

FIG 10 is an illustrative view of a class (3+,1) tile,

FIG 11 is an illustrative view of a class (2+,2+) tile,

FIG 12 shows an example of an unsuccessful search for a particular query key in a Patricia Tree containing six keys, and

FIG 13 shows the Patricia Tree resulting from an insertion of the query key from the unsuccessful search according to FIG 12.

### Detailed Description of the Invention

An example of a modern network topology from a company's or an organisation's point of view is shown in FIG 1. An internal network 1, such as an Intranet comprises several network nodes 2 such as PCs, workstations, file servers etc, which are connected to a firewall 3. Companies or organisations connected to an external network 4 (Internet) intend to publish company related information, such as products and services, on the web, get access to information published by other companies or organisations on the Internet, and correspond via email. However, the company might have internal information that users on the Internet not are allowed to access, for example information available via the Intranet information servers, file servers etc. Thus, to allow Internet users to access public information they are allowed to be connected to a limited set of servers, for example the web, email etc., and denied to access information on other hosts, such as Intranet servers. The public servers are available in a "Demilitarised Zone" (DMZ) 5, which is connected to the firewall 3. Further, the firewall 3 is connected to the Internet via a router 6, and, hence, connections to nodes in the DMZ 5 can be made from the external network or Internet 4 as well as from the Intranet 1, but accesses to the Intranet 1 from the Internet 4 is restricted.

In the following description, numerous specific details, are provided in detail in order to give a more thorough description of the present invention. It will be obvious for those skilled in the art that the present invention may be practiced without these specific details. Some well-known features are not described in detail so as not to make the present invention unclear.

One embodiment of the firewall and the different modules in the fast path and how the filtered packets flows through according to the invention is shown in FIG 2.

In a simple case a packet is received from a network 1, 4, or 5 in a firewall input connection 7 and is applied to the input of 2-dimensional address lookup means or a 2d-SFT block 8. A intermediate connection 9 connects the 2d-SFT and rule matching means or block 10, wherein the packet is either passed (down) or blocked b5. However, in order to work properly the firewall according to the invention has a number of additional modules.

In this embodiment a lookup of source address and destination address are performed in the 2d-SFT block 8, resulting in a rule or actually a short list of rules. The rule list remains in the rule matching block 10 until the list is searched and a matching rule is found. Additionally, information of whether the packet might need to be processed by the other modules or not are generated by the 2d-SFT lookup. Some of these decisions are taken during the rule matching which means that the rule matching actually starts before entering the block, as illustrated in FIG 2. The 2d-SFT block 8 is described in detail below.

When a packet is too large to be sent over a link, it is fragmented. This means that everything that follows the IP header is cut into pieces (fragments) and each fragment is supplied with its own IP header. The additional fragments flag and the fragment offset is set in each fragment to indicate if it is the last fragment or not, and to record where the data of the fragment fits into the original (unfragmented) packet.

When a packet is fragmented, only the first fragment, the fragment header, contains the transport header (TCP, UDP, or ICMP header). This means that the following fragments can not be matched against a rule involving for example ports.

According to the invention, a fragment machine 11 collects fragments from each fragmented packet until the fragment header arrives (fragment does not necessarily

arrive in order). Then, the pieces of information present only in the fragment header are stored in the entry associated with that fragmented packet, and the collected fragments are applied to the output o1, connected to the 5 connection 7, with the fragment header first. Each fragment that is transmitted from the fragment machine is supplied with the fragment header information, so that it can be processed by the filter just as if it was an unfragmented packet. The additional fragments flag and the fragment 10 offset are checked to determine if the packet is applied to the input i1 - connected to the connection 7 - of the fragment machine 11 or not.

When all fragments of a fragmented packet has been received in the fragment machine 11, the entry for the 15 packet is removed.

At some points, the fragment machine might also decide to block fragments. This happens when broken fragmented packets arrives (possibly as a result of an attack), if the number of collected fragments exceeds a 20 certain limit, or simply as a result of garbage collection (old entries are removed to make place for new ones).

Network Address Translation (NAT) is commonly used when a company have an network with many internal IP 25 addresses and only a few external (real) IP addresses. Some parts of IP address space are reserved for internal addresses, such as 10.\*.\*.\*., 192.168.\*.\*., and 172.16.\*.\*. These addresses can freely be used on internal/private networks. However, they must never be visible on the external. Therefore, the firewall is setup to translate 30 internal source addresses to external source addresses as packet goes from the internal to an external network. For packets going in the other direction, the external destination address is translated to an internal address as the packets goes through the firewall. In order to map many

internal addresses onto a few external addresses, ports are also used.

For example, the firewall is setup to map internal addresses from 10.1.0.0 to 10.1.255.255 ( $2^{16}$  addresses) to 5 external addresses 194.22.187.0 to 194.22.187.255 ( $2^8$  addresses) using ports 20000 to 20255 ( $2^8$  ports).

When a connection is initiated from 10.1.1.1 port 4000 to 130.240.64.46 port 6000, an address a and a port p, so that (a,p) does not collide with any other NAT 10 connection, is picked from the address and port range. Then, each outgoing, internal to external (I2X), packet from that connection, the source address 10.1.1.1 and port 4000 are replaced by a and p respectively. For each 15 incoming, external to internal (X2I) packet, the destination address a and port p are replaced by 10.1.1.1 and 4000, respectively.

In this way, the 256 external addresses together with the 256 ports can represent the 65536 addresses of the internal network.

20 As a result from the 2d-SFT lookup, also information about if a packet is subject to an external to internal address translation is achieved, and the packet is applied on the input i2 of an X2I-NAT block 12 performing the external to internal address translation. Therefore, the 25 overhead for performing X2I-NAT lookup is removed on all packets not requiring translation. For packets where X2I-NAT lookup is performed, the packets are sent to slow path means 13 via its slow path output s2 in the case of failure since updates of the NAT data structure are dealt with 30 therein. When a successful X2I-NAT lookup is performed, the address and ports are changed and a rule matching of the new source-destination pair is retrieved before the packet is sent to the next filtering step via its output o2.

Also, as a result from the 2d-SFT lookup or from the 35 X2I-NAT lookup, it is clear if the packet is subject to

internal to external (I2X) address translation. This is performed basically in the same way as X2I-NAT, but is performed as the last filtering step. A packet subject to internal to external (I2X) address translation received 5 from the output connection 15 of the rule matching block 10 is applied on the input i5 of an I2X-NAT block 14, performing the internal to external address translation. For packets where I2X-NAT lookup is performed, the packets are sent to the slow path means 13 via its slow path output 10 s5 in the case of failure since updates of the NAT data structure are dealt with therein. When a successful I2X-NAT lookup is performed, the address and ports are changed and the packet is transmitted to the appropriate network via its output o2 and the output connection 15.

15 The reason for having X2I-NAT as the first step after 2d-SFT lookup and I2X-NAT as the last step is that filtering rules are given with respect to internal addresses, which are fixed, and not NAT address, which are assigned dynamically.

20 Usually, most of the traffic that goes from an external network 4 to an internal network 1 is blocked, to protect the internal network. However, hosts on the internal network are usually allowed to access hosts on the external network 4. In order to receive any return traffic 25 from the external, a temporary exception from the external-to-internal blocking rule must be made for connections initiated from the internal network. This is referred to as hole punching (HP), i.e a hole for returning packets are punched through the firewall. The hole exists only during 30 the lifetime of the connection, and does only affect packets from the connection.

35 Hole punching also keep track of the TCP sequence numbers in order to protect hole punched connections from being hijacked. Therefore, it is necessary both to perform HP lookup of outbound (I2X) packets performed by an I2X-HP

block 16 and inbound (X2I) packets performed by an X2I-HP block 17.

As a result from the 2d-SFT lookup or from X2I-NAT lookup, we know if the packet is subject to internal to 5 external (I2X) or external to internal (X2I) hole punching. This means that we can avoid the overhead from performing HP lookups on packets that can not be subject to hole punching. An outbound packet subject to hole punching is applied to an input i3 of the I2X-HP block 16, whereby the 10 source and destination addresses and ports, and the protocol, are looked up in order to find an existing state. If no such state exists, the packet is sent to the slow path means 13 via its slow path output s3, wherein the HP data structure is updated and a state is created. If a 15 matching state is found, TCP-sequence numbers etc are updated before the packet is sent to the next filtering step via another output o3.

The X2I-HP is performed in the same way. An inbound packet subject to hole punching is applied to an input i4 20 of the X2I-HP block 17, whereby the source and destination addresses and ports, and the protocol, are looked up in order to find an existing state. If no such state exists, an attempt to send the packet through a non-existent hole 25 in a blocking rule has been made and the packet is blocked at its output b4. If a matching state is found, it is updated before the packet is sent to the next filtering step via another output o4.

Again referring to the 2d-SFT block 8, in dependence 30 of the contents in data fields of a data packet being transmitted between said networks, a rule applicable to the data packet is selecting from a total set of rules, whereby said packet is blocked or forwarded through the firewall. In order to reduce the set of rules to be searched 35 linearly, the rule set is segmented. According to the invention, this is performed by means of a 2-dimensional

lookup of the source and destination addresses of the packet in a set of address prefixes, wherein each prefix has a subset of rules of the total set of rules, in order to find a prefix associated with the source and destination addresses. Then, based on the contents of said data fields, a rule matching is performed by the rule matching means 10 in order to find the rule applicable to the data packet.

When performing the 2-dimensional lookup of the addresses, each rule is seen as covering a rectangular area 10 of a 2-dimensional plane, wherein the offset and size of the rectangle is determined by the address prefixes and prefix lengths. Hence, the lookup is considered to be the same problem as finding the rectangle surrounding a point in the plane. To simplify the lookup, a restriction is made 15 to assure that each point in the plane is covered by one and only one rectangle, resulting in an easier lookup procedure.

After the 2-dimensional address lookup is performed the lookup continues with a resulting subset of rules 20 associated with the current prefix found. The address fields are, however, not used in the final rule matching. Thus, if a rule is not valid for the addresses of the current packet it is not in the list of rules resulting from the address lookup.

25 Since each rule is represented by a rectangle covering a part of the total address space and several rules may be applicable to the same addresses, the rectangles may overlap. However, in order to make the method according to the invention to operate in the proper 30 way overlapping rectangles are not allowed. Consequently, in order to fulfil the non-overlap criteria the following steps have to be performed:

1. For each rule, create the rectangle in the address space.

2. Create a set containing only the newly created rectangle. This set will be called the compare set.

3. For all rectangles already in the plane; compare it to each rectangle in the compare set.

5 4. If they are overlapping, cut out the non-overlapping parts. The rule list of the overlapping parts is assigned the rule from the new rectangle appended at the end thereof.

10 5. For all parts - if the part was a part of the rectangle already on the plane, return it to the plane. If not, add it to the set of rectangles to be compared.

6. If the compare set is none-empty, return to step 3. Rectangles already in the plane and which have already been compared can be left out.

15 7. At this state the compare set is empty. If any rectangles were overlapping the new one they are split up into smaller parts if needed, with the common parts having rule lists containing the new rule.

20 In another method to fulfil the non-overlap criteria there is not just a set of rectangles in the plane. Instead, each rectangle contains, apart from its coordinate and rule list index, a set of rectangles or subrectangles. Each of the subrectangles have an additional set of subrectangles. However, sometimes it is necessary to 25 refer to the same subrectangle and to traverse a directed Acyclic graph (DAG) of rectangles depth.

There is always one root rectangle covering the whole plane. This represents the default to follow if all other comparison fail. The rule action is either blocked or 30 allowed to pass depending on the configuration.

A rectangle called root is the root rectangle to which a rectangle new is to be added.

If the root and the new rectangles are of the same size the rules in the new rectangle is added to the rule 35 list associated with the root rectangle.

Iterate over all subrectangles of the root rectangle. If the new rectangle can be completely covered by any of these, make a recursive call with the subrectangle as the root instead and then return.

5 Once again, iterate over all subrectangles in the root rectangle.

If a subrectangle can be completely contained in the new rectangle, it is moved from the root rectangle to the new rectangle. The rule list of the subrectangle and all 10 rectangles under it needs to be modified to include the rule of the new rectangle as well.

If the subrectangle intersects with the new rectangle, a new rectangle is created comprising the common part of the two. The rule list of the intersecting 15 rectangle is a combination of the original ones. Then, the new rectangle is added to both the original subrectangle and the new rectangle.

Once all rectangles are added to the DAG the graph can be traversed and the list of prefix-defined rectangles 20 that is needed by the two dimensional lookup building code can be produced. The intersecting rectangle will be a proper prefix defined rectangle, but the rest of the surrounding rectangle after the subrectangles have been cut out may not be properly defined by prefixes.

25 When the data structure is used for filtering lookups as described above, the lookup is made in two steps. First a two dimensional address lookup is performed, resulting in an integer number. This integer is an index into an array of rules, wherein each rule specifies which fields to 30 compare and what action to perform if a match was found. Each rule has a next field indicating which rule to continue with in case of a mismatch. The traversing of the rule list is continued until a match is found, and when proper actions are taken in order to block or forward the 35 packet.

The 2-dimensional prefix problem is solved as follows.

The address space or universe  $\mathbf{U}$  is a 2 dimensional space consisting of integer pairs  $(s, d)$  satisfying:

$$5 \quad 0 \leq s < 2^{32}, \quad 0 \leq d < 2^{32}.$$

A subset  $R$  of  $\mathbb{U}$  satisfying:  $(s, d) \in R$  if  $s_0 \leq s < s_1$ ,  $d_0 \leq d < d_1$ , wherein  $(s_0, d_0), (s_1, d_1) \in \mathbb{U}$  is called a rectangle. Further, the pair of points  $[(s_0, d_0), (s_1, d_1)]$  uniquely defines  $R$ .

10 A rectangle defined by  $[(s_0, d_0), (s_1, d_1)]$ , where  $s_1 - s_0 = s_1 - 2^{i_s} * k_s = 2^{i_s}$  and  $d_1 - d_0 = d_1 - 2^{i_d} * k_d = 2^{i_d}$  for some non negative integers  $i_s, i_d, k_s$ , and  $k_d$  is called a prefix.

Given a point  $(s, d) \in U$  and a set of prefixes  $P = \{P_1, P_2, \dots, P_n\}$ , such that  $P$  is a partition of  $U$ , the 2 dimensional prefix matching problem is the problem of computing  $i$  such that  $(s, d) \in P_i$ .

The source-destination part of the firewall filtering problem is represented as a 2-dimensional prefix matching problem, where the set  $P$  is obtained by converting the routing table and the filtering rules into a partition of prefixes. Since each packet to be filtered requires a prefix matching, it becomes necessary to find a representation of  $P$  such that the prefix matching can be computed efficiently.

25 A number of prefixes that partitions a small 32 x 32  
bits universe is shown in FIG 3. Black squares 18  
represents bits set (representatives) and white squares 19  
represents not set bits. Note: point (0,0) is located in  
the upper left corner in FIG 3.

30 For each prefix  $P = [(s_0, d_0), (s_1, d_1)] \in \mathbf{P}$  the point  $p_0 = (s_0, d_0)$  is chosen as a representative of  $P$ . Further, let  $\mathbf{p} = \{p_1, p_2, \dots, p_n\} = \{(s_1, d_1), (s_2, d_2), \dots, (s_n, d_n)\}$  denotes the set of representatives of the prefixes in  $\mathbf{P}$ .

Given a point  $(s_d, d_d) \in \mathbf{U}$ , for each  $(s, d) \in \mathbf{U}$ , such that  $s_d \geq s$  and  $d_d \geq d$ ,  $(s_d, d_d)$  is a dominating point of  $(s, d)$ , or alternatively,  $(s, d)$  is dominated by  $(s_d, d_d)$ .

Given a pair of points  $(s_1, d_1), (s_2, d_2) \in \mathbf{U}$ , the 5 distance between the points under the norm  $L_\infty$  is given by:

$$\lim_{k \rightarrow \infty} \sqrt[k]{|s_1 - s_2|^k + |d_1 - d_2|^k} = \max(|s_1 - s_2|, |d_1 - d_2|)$$

10 Now, given a point  $p = (s, d)$ , the problem of finding the matching prefix in  $\mathbf{P}$  is equivalent to the problem of finding the closest dominating point  $p$  in  $\mathbf{p}$  under the norm  $L_\infty$ , i.e. the dominating point of  $p_i \in \mathbf{p}$  of  $p$  minimizing the  $L_\infty$ -distance between  $p_i$  and  $p$ . Hence, it is sufficient to 15 represent only the dominating points instead of the prefixes themselves.

As shown in FIG 4, the set  $\mathbf{p}$  is conceptually 20 represented as a  $2^{32} \times 2^{32}$  points bit matrix, where bit  $p$  is set if  $p \in \mathbf{p}$ . To reduce the space required for the representation, we actually represent  $\mathbf{p}$  as a four level  $2^{8+8}$ -ary tree. Each level is (again) conceptually 25 represented as a  $2^8 \times 2^8$  bits bit matrix where bit  $(s, d)$  is set if there is a dominating point in the sub-tree below. That is, at level 1 (the top level), bit  $(s, d)$  represents the presence or absence of a dominating point in the rectangle  $[(2^{24}*s, 2^{24}*d), (2^{24}*(s+1), 2^{24}*(d+1))]$  of  $\mathbf{U}$ .

The actual representation of a level is a 2-dimensional dense chunk or simply a 2d-chunk. How and when 30 a level can be represented by a 1-dimensional dense chunk is discussed later. A 2d-chunk consists of  $32 \times 32$  tiles, where each tile represents  $8 \times 8$  bits. Since the points defining a tile are dominating points of prefixes, not all  $2^{64}$  kinds of tiles are possible. In fact, we impose a restriction on the tiles so that only 677 different kinds 35 are possible.

If there is a point in a tile  $T$  (a point in some of the sub-universes represented by one of the bits in the tile) having its closest dominating point in another tile  $T_d$  then all points in  $T$  have their closest dominating points in  $T_d$ . The definition of a dominating point is extended to a dominating tile. The tile  $T_d$  is called a dominating tile of  $T$ , or alternatively, tile  $T$  is dominated by the tile  $T_d$ .

In order to fulfil the requirement of the previous definition the following lemma is needed.

If  $P = [(s_0, d_0), (s_1, d_1)]$  is a prefix satisfying  $s_1 - s_0 > 1$ , then  $[(s_0, d_0), (s_0 + 2^i, d_1)]$  and  $[(s_0 + 2^i, d_0), (s_1, d_1)]$ , wherein  $s_1 - s_0 = 2^i$  for some non-negative integer  $i$ , are also prefixes. The lemma for the other dimension is symmetrical.

By the lemma above, a prefix can be cut into 2 parts whenever required. Hence, given a set of prefixes  $P_d$  with representatives in the tile  $T_d$  we can repeatedly cut them until all prefixes has their endpoints in the same tile, in both dimensions, to fulfil the requirement above. This is called tile cutting and a crucial part of the construction of dense2d chunks.

The different kinds of tiles are divided into seven classes shown in FIG 5-11. For each class the/a tile is shown as a bit matrix in (asterisks represents bits that can be either 0 or 1). For each bit set (not \*) and tile class there are also lines indicating the guaranteed boundaries of the subset dominated by that bit (point). Note that a set bit in a tile can typically dominate points in other tiles to the right and/or below. We also give the number of different kinds of tiles in the class and distinguish between natural and restricted tile classes. Finally, we describe how the tiles are represented/encoded in the dense2d chunk.

A class (0, 0) tile is shown in FIG 5. No bit is set: natural, 1 kind, and always dominated by a tile  $T_d$  from

class (1, 1), (1, 2), (2, 1), (1, 3+), or (3+, 1). Finding the dominating point of a point in bit  $(s_b, d_b)$  in a class (0, 0) tile is exactly the same as finding the dominating point of the corresponding point in bit  $(s_b, d_b)$  of its 5 dominating tile  $T_d$ . Hence, a class (0, 0) tile can, and should, always be encoded exactly the same way as its dominating tile  $T_d$ .

A class (1, 1) tile is shown in FIG 6. One bit is set: natural, 1 kind, and possibly dominates class (0, 0) tiles to the right and/or below. Since all points within 10 this tile has the same closest dominating point, we simply encode a reference to that point within the tile itself.

A class (1, 2) tile is shown in FIG 7. Two bits in the first row (D-dimension) are set: natural, 1 kind, and possibly dominates class (0, 0) tiles below. Can not 15 dominate class (0, 0) tiles to the right.

There are two closest dominating points of the points in this tile, one for the points in the left half, and one for the points in the right half. We encode references to 20 both these dominating points as an array of length 2, and can then use the left/right half of the query point as indices.

A class (2, 1) tile is shown in FIG 8. Two bits in the first column (S-dimension) are set: natural, 1 kind, and possibly dominates class (0, 0) tiles to the right. Can 25 not dominate class (0, 0) tiles below. There are two closest dominating points of the points in this tile, one for the points in the top half, and one for the points in the bottom half. References to both these dominating points are encoded as an array of length 2, and can then use the 30 top/bottom half of the query point as indices.

A class (1, 3+) tile is shown in FIG 9. Three or more bits in the first row are set: natural, 24 kinds, and possibly dominates class (0, 0) tiles below. Can not 35 dominate class (0, 0) tiles to the right. There may be many

dominating points of the points in this class of tiles. It is necessary to encode the kind of the tile since there are 24 different kinds of tiles. Further, for each bit set in the first row, a pointer to the dominating point below (if 5 there is only one) or to the next level chunk (if there several dominating points) are encoded. Finally, a reference to the first pointer is encoded (a base pointer). In this way, the dominating point (or a reference to the next level chunk) of a query point  $(s, d)$  can be found by 10 simply inspecting in which column the  $d$  is and together with the kind of the chunk perform a table lookup to retrieve a pointer offset  $x$ , and finally retrieve the pointer  $x$  pointers away from the base pointer. Note that any next level chunk only needs to be one (D-)dimensional 15 since all representatives in the tile lies on the same S-co-ordinate.

A class  $(3+, 1)$  tile is shown in FIG 10. Three or more bits in the first column are set: natural, 24 kinds, and possibly dominates class  $(0, 0)$  tiles to the right. Can 20 not dominate class  $(0, 0)$  tiles below. There may be many dominating points of the points in this class of tiles. It is necessary to encode the kind of the tile since there are 24 different kinds. Further, for each set bit in the first column, a pointer to the dominating point below (if there 25 is only one) or to the next level chunk (if there several dominating points) are encoded. Finally, a reference to the first pointer is encoded (a base pointer). In this way, the dominating point (or a reference to the next level chunk) of a query point  $(s, d)$  can be found by simply inspecting in 30 which row the  $s$  is and together with the kind of the chunk perform a table lookup to retrieve a pointer offset  $x$ , and finally retrieve the pointer  $x$  pointers away from the base pointer. Note that any next level chunk only needs to be one (S-)dimensional since all representatives in the tile 35 lies on the same D-co-ordinate.

A class (2+, 2+) tile is shown in FIG 11. Two or more bits are set in both the first row and the first column: restricted, 625 kinds, can not dominate another tile, and can not be dominated by another tile. There are typically 5 many dominating points in this class of tiles. The encoding is performed exactly as for class (1, 3+) and (3+, 1) tiles. However, a restriction is imposed to reduce the number of different kinds before performing the actual encoding. The first task is to impose a restriction similar 10 to the tile restriction of Definition 8 on each bit. Then a pair of bit vectors of length 8,  $S_v$  and  $D_v$ , is computed wherein

15  $S_i = 1$ , if there is a bit set in the  $i$ th row, and  
0, otherwise  
 $D_i = 1$ , if there is a bit set in the  $i$ th column, and  
0, otherwise

20 A new tile is finally created, by computing the product of  $S_v$  and  $D_v^T$  using matrix multiplication, and encoded.

25 As in class (1, 3+) and (3+, 1) tiles, one dimensional sub-levels may be provided also in this case. It is checked whether all representatives in a bit, containing more than one representative, is in the same row in  $U$ , which means that the S-dimension collapses, or on the same column in  $U$ , which means that the D-dimension collapses.

30 A further description of the data structures used in the firewall for representing NAT and HP entries.

35 In both cases, the pair of IP addresses  $saddr$  and  $daddr$ , the pair of ports  $sport$  and  $dport$ , and the protocol  $proto$  of the processed packet are used as key in the lookup. The first step in the lookup is to compute a hash value. This is accomplished using very simple and fast

instructions such as bit shifts bit-wise logical operators. Using the hash value as index, a 16 bits pointer is then retrieved from a large array (the Hash table).

The pointer is either 0, which means that the lookup failed (empty) or refers to the root of a Patricia tree, which is a very efficient data structure for representing small sets of keys. If the pointer refers to a Patricia tree, a key is built by concatenating the bit patterns of *saddr*, *daddr*, *sport*, *dport*, and *proto*. The key is then used when searching the Patricia tree as described in the next section.

A Patricia Tree, is a binary tree that treats query keys as bit arrays, and uses a bit index in each internal node to direct the branching. Searching is accomplished by traversing the tree from the root to a leaf. When visiting an internal node with bit index *i*, bit *i* of the query key is inspected to determine whether to continue the search in the left (if the bit is 0) or right (if the bit is 1) sub-tree. The traversal stops when arriving at a leaf. To determine if the query key is present in the table or not, the query key is then compared to the key stored in that leaf. If the two keys are equal, the search is successful.

FIG 12 illustrates an example of an unsuccessful search for the query key 001111 in a Patricia Tree containing six keys. Bits no. 0, 2, and 3 are inspected during the traversal, which ends at the leaf with key 011101. As the query and leaf keys are compared, a mismatch is detected in bit no. 1.

With respect to the bit indices stored in the internal nodes, a Patricia Tree is heap ordered. That is, any internal node, except the root, has a bit index greater than the bit index of its parent. It follows that all keys stored in a sub-tree rooted at a node with bit index *i* are identical up to, and including, bit *i-1*.

Insertion is accomplished by first performing an unsuccessful search, and recording the index  $i$  of the first mismatching bit in the comparison of the query and leaf key. Two new nodes are then created, a new internal node with index  $i$  and a leaf node for the query key. Depending on whether the  $i$  th bit of the query key is 0 or 1, the leaf is stored as the left or right sub-tree, respectively, of the internal node. By using the other sub-tree field as link field, the internal node is then inserted directly above the node with smallest bit index larger than  $i$  in the path traversed from the root to the leaf.

FIG 13 shows the Patricia Tree resulting from inserting the query key from the unsuccessful search of the previous example in FIG 12. A new internal node with bit index 1 is created, and inserted between the nodes with bit indices 0 and 2, in the path traversed from the root.

The Patricia Hashing used for hole punching works exactly as described above - a simple Hash table lookup followed by a Patricia tree lookup. Most of the time, a leaf is reached directly, which means that it is not necessary to build a bit array from the parameters - these are compared directly to corresponding fields in the structure containing/representing the Patricia leaf.

One lookup function `hp_lookup(iaddr, xaddr, iport, xport, protc)` is provided that are used both for I2X-HP and X2I-HP. The only difference between these are the order in which the parameters are given. For I2X-HP, the function call is `hp_lookup(saddr, daddr, sport, dport, proto)` and for X2I-HP the call is `hp_lookup(daddr, saddr, dport, sport, proto)`.

The lookup function returns a reference to a structure containing the Patricia leaf key, i.e. `iaddr, xaddr, iport, xport, and proto`, and a couple of other

fields representing the state of the connection, for example TCP sequence numbers.

5 The Patricia Hashing for NAT is slightly more complicated than for HP. The reason is that three different addresses and ports, *iaddr*, *naddr*, *xaddr*, *iport*, *nport*, *xport*, are involved, as opposed to HP where only two addresses and ports are involved. This means that the difference between I2X and X2I becomes a little more tricky than just swapping addresses and ports in the lookup.

10 The problem is solved by letting the least significant bit of the hash value reflect if the lookup is I2X or X2I (this is essentially the same as using two hash tables). The structure containing the Patricia leaf keys for a NAT connection is the same for I2X and X2I and it 15 contains all three addresses and ports.

15 There are two lookup functions, *nat\_i2x\_lookup(saddr, daddr, sport, dport, proto)* and *nat\_x2i\_lookup(saddr, daddr, sport, dport, proto)*. Both functions uses the arguments to compute a hash value where the least 20 significant bit is set to accordingly. If the resulting pointer refers to a Patricia node (internal node), the addresses, ports, and protocol are concatenated to create the bit array needed for traversing the Patricia tree. When 25 the leaf structure is reached, the addresses, ports, and protocol are compared to the corresponding fields in the leaf.

When a packet is subject to I2X-NAT:

30 *saddr* (of the packet) is compared to *iaddr* (of the leaf structure)

*daddr* is compared to *xaddr*

*sport* is compared to *iport*

*dport* is compared to *xport*

*proto* is compared to *proto*

If all of these matches, the lookup is successful, and the source address and port, *saddr* and *sport*, of the packet are replaced by *naddr* and *nport* (of the leaf structure), respectively, before the packet is forwarded.

5

When a packet is subject to X2I-NAT:

*saddr* (of the packet) is compared to *xaddr* (of the leaf structure)

10        *daddr* is compared to *naddr*  
          *sport* is compared to *xport*  
          *dport* is compared to *nport*  
          *proto* is compared to *proto*

15        If all of these matches, the lookup is successful, and the destination address and port, *daddr* and *dport*, of the packet are replaced by *iaddr* and *iport* (of the leaf structure), respectively, before the packet is sent to the next processing step.

20        Updates of the HP and NAT data structures are performed by the EffNIX kernel (previously NetBSD) running on the BSP (processor 1) but most of the lookups are performed by the forwarding kernel running on the AP (processor 2). There are only one instance of the HP data structure and one instance of the NAT data structure. These resides in shared memory and are accessed by the two processors simultaneously. This results in a very interesting synchronisation problem - one writer and one reader. The synchronisation is solved by letting the update routines invalidate the leafs structures and nodes before changing anything (writing). The lookup routines checks that the accessed leafs and nodes are valid before and after they have been accessed, and also that they have not been changed during the access. If a race occurs and is detected (all dangerous race conditions are detected) the

lookup fails and the packet is sent to the BSP and dealt with there (either a successful lookup followed by processing is performed, or the data structures are updated).

5 It should be apparent that the present invention provides a firewall apparatus and a method of controlling network data packet traffic between internal and external networks that fully satisfies the aims and advantages set forth above.

10 Although the invention has been described in conjunction with a specific embodiment thereof, this invention is susceptible of embodiments in different forms, with the understanding that the present disclosure is to be considered as an exemplification of the principles of the invention and is not intended to limit the invention to the specific embodiment illustrated.

## CLAIMS

1. A firewall (3) for controlling network data packet traffic between internal and external networks (1,5,4), comprising filtering means for selecting from a total set 5 of rules, in dependence of the contents in data fields of a data packet being transmitted between said networks a rule applicable to said data packet, in order to block said packet or to forwarded said packet through the firewall (3), characterized by 2-dimensional address 10 lookup means (8) for a 2-dimensional lookup of said source and destination addresses of the packet in a set of address prefixes, each prefix having a subset of rules of the total set of rules, in order to find a prefix, via its representation, associated with said source and destination 15 addresses, and rule matching means (10) for rule matching - on the basis of the contents of said data fields in order to find the rule applicable to said data packet.

2. A firewall according to claim 1, 20 characterized in that said 2-dimensional address lookup means (8) comprises means for finding the prefix associated with said source and destination addresses by determining the closest dominating point  $p$  in  $p$  under the norm  $L_\infty$ , i.e. the dominating point of  $p_i \in p$  of 25  $p$  minimising the  $L_\infty$ -distance between  $p_i$  and  $p$ .

3. A firewall according to claim 2, characterized in that 30 the source and destination addresses are represented by a point  $(s, d) \in U$ , wherein  $U$  is a 2 dimensional address space represented by integer pairs  $(s, d)$  satisfying:  $0 \leq s < 2^{32}$ ,  $0 \leq d < 2^{32}$ , the prefixes  $P = \{P_1, P_2, \dots, P_n\}$  is a partition of the 35 address space  $U$ , and

each prefix  $P_i$  is a logical rectangle  $R$  in the address space  $U$  defined by  $[(s_0, d_0), (s_1, d_1)]$ , where  $s_1 - s_0 = s_1 - 2^{i_s} * k_s = 2^{i_s}$  and  $d_1 - d_0 = d_1 - 2^{i_d} * k_d = 2^{i_d}$  for some non negative integers  $i_s, i_d, k_s$ , and  $k_d$ ,

5 said logical rectangle  $R$  being a subset of  $U$  satisfying:  $(s, d) \in R$  if  $s_0 \leq s < s_1$ ,  $d_0 \leq d < d_1$ , wherein  $(s_0, d_0), (s_1, d_1) \in U$ , and the pair of points  $[(s_0, d_0), (s_1, d_1)]$  uniquely defines said rectangle  $R$ .

10 4. A firewall according to claim 2 or 3,

characterized in that

for each prefix  $P = [(s_0, d_0), (s_1, d_1)] \in \mathcal{P}$ , the point  $p_0 = (s_0, d_0)$  is a representative of  $P$ , and  $\mathbf{p} = \{p_1, p_2, \dots, p_n\} = \{(s_1, d_1), (s_2, d_2), \dots, (s_n, d_n)\}$  is the set of 15 representatives of the prefixes in  $\mathcal{P}$ , wherein given a point  $(s_d, d_d) \in U$ , for each  $(s, d) \in U$ , wherein  $s_d \geq s$  and  $d_d \geq d$ ,  $(s, d)$  is dominated by  $(s_d, d_d)$ .

20 5. A firewall according to claim 3,

characterized in that, given a pair of points  $(s_1, d_1), (s_2, d_2) \in U$ , the distance between the points under the norm  $L_\infty$  is given by:

$$\lim_{k \rightarrow \infty} \sqrt[k]{|s_1 - s_2|^k + |d_1 - d_2|^k} = \max(|s_1 - s_2|, |d_1 - d_2|).$$

25

6. A firewall according to any of the preceding claims, characterized by a fragment machine (11) comprising fragment collecting means for collecting 30 packet fragments from a fragmented packet until a fragment header of said packet is received, fragment header storing means for storing in an entry means information present in a fragment header field of the packet, fragment forwarding means for forwarding packet fragments provided with 35 fragment header information starting with the fragment

header, wherein each fragment is processed by the filtering means as a regular unfragmented packet.

7. A firewall according to any of the preceding  
5 claims, characterized by network address translation means (12,14) for translating, in dependence of the information in the prefix, internal source addresses to external source addresses of a packet transmitted out through the firewall (3), or external source addresses to  
10 internal source addresses of a packet transmitted in through the firewall (3).

8. A firewall according to any of the claims 1-6, characterized by network address translation  
15 means (12, 14) for translating, in dependence of the information in the prefix internal source addresses to external source addresses of a packet transmitted from the internal network (1) to the external network (4), or external source addresses to internal source addresses of a  
20 packet transmitted from the external network (4) to the internal network (1).

9. A firewall according to any of the preceding claims, characterized by hole punching means  
25 (16,17) for determining, on the basis of the information in the prefix, if said packet is subject to a temporary exception from an external-to-internal blocking rule for a connection initiated from the internal network, wherein a return channel for packets transmitted from the external  
30 network (4) to the internal network (1) is established through the firewall during the lifetime of the connection.

10. A firewall (3) for controlling network data packet traffic between internal and external networks (1,5,4),  
35 comprising filtering means for selecting from a total set

of rules, in dependence of the contents in data fields of a data packet being transmitted between said networks, a rule applicable to the data packet, in order to block said packet or to forward the packet through the firewall (3),  
5 characterized by a fragment machine (11) comprising fragment collecting means for collecting packet fragments from a fragmented packet until a fragment header of said packet is received, fragment header storing means for storing in an entry means information present in a  
10 fragment header field of the packet, fragment forwarding means for forwarding packet fragments provided with fragment header information starting with the fragment header, wherein each fragment is processed by the filtering means as a regular unfragmented packet.

15

11. A method of controlling network data packet traffic between internal (1,5) and external networks (4) through a firewall (3), comprising the steps of,

20 selecting from a total set of rules, in dependence of the contents in the data fields of a data packet being transmitted between said networks, a rule applicable to the data packet,

applying said rule on said packet, and  
depending on the rule, blocking said packet or  
25 forwarding said packet through the firewall (3),

characterized in that said filtering comprises the further steps of:

30 performing a 2-dimensional lookup of the source and destination addresses of the packet in order to find a prefix, via its representation, associated with said source and destination addresses in a set of address prefixes, each prefix having a subset of rules of the total set of rules,

and on the basis of the contents of said data fields  
35 of the packet, performing a rule matching on the subset of

rules in order to find the rule applicable to the data packet.

12. A method according to claim 11,  
5 characterized in that preceding the step of selecting a rule applicable to the data packet it comprises the further steps of:

collecting packet fragments from a fragmented packet until a fragment header of said packet is received,

10 storing in an entry means information present in a fragment header field of the packet, and

forwarding packet fragments provided with fragment header information starting with the fragment header, wherein each fragment is processed by the filtering means  
15 as a regular unfragmented packet.

13. A method according to claim 11 or 12,  
characterized in that preceding the step of performing a rule matching it comprises the further step  
20 of:

in dependence of the information in the prefix, translating the external source address to an internal source address of a packet to be transmitted in through the firewall (3).

25 14. A method according to any of the preceding claims 11-13, characterized in that preceding the step of performing a rule matching it comprises the further step of:

30 depending on the information in the prefix, translating the external source address to an internal source address of a packet to be transmitted from the external network (4) to the internal network (1,5).

15. A method according to any of the preceding claims 11-14, characterized by the further step of: depending on the information in the prefix translating the internal source address to an external 5 source address of a packet to be transmitted out through the firewall (3).

16. A method according to any of the preceding claims 11-15, characterized by the further step of: 10 depending on the information in the prefix translating the internal source address to an external source address of a packet to be transmitted from the internal network (4) to the external network (1).

15 17. A method according to any of the preceding claims 11-16, characterized in that preceding the step of performing a rule matching it comprises the further steps of: based on the information in the prefix, determining 20 if said packet is subject to a temporary exception from an external-to-internal blocking rule for a connection initiated from the internal network (1), if so, establishing a return channel for packets transmitted from the external network (4) to the internal 25 network (1) through the firewall (3), having a duration corresponding to the lifetime of the connection.

18. A method of controlling network data packet traffic between internal and external networks (1,5,4) 30 through a firewall (3), comprising the steps of, in dependence of the contents in the data fields of a data packet being transmitted between said networks, selecting from a total set of rules a rule applicable to the data packet, 35 applying said rule on said packet,

and depending on the rule, blocking said packet or forwarding said packet through the firewall (3), characterized in that preceding the step of selecting a rule applicable to the data packet it comprises  
5 the further steps of:

collecting packet fragments from a fragmented packet until a fragment header of said packet is received,

storing in an entry means information present in a fragment header field of the packet, and

10 forwarding packet fragments provided with fragment header information starting with the fragment header, wherein each fragment is processed by the filtering means as a regular unfragmented packet.

15 19. A method according to any of the preceding claims 11-18, characterized in that the step of performing a 2-dimensional lookup of the source and destination addresses of the packet comprises the further step of:

20 finding the closest dominating point  $p$  in  $\mathbf{p}$  under the norm  $L_\infty$ , i.e. the dominating point of  $p_i \in \mathbf{p}$  of  $p$ , which minimises the  $L_\infty$ -distance between  $p_i$  and  $p$ .

25 20. A method according to claim 19, characterized in that the source and destination addresses are represented by a point  $(s, d) \in \mathbf{U}$ , wherein  $\mathbf{U}$  is a 2 dimensional address space represented by integer pairs  $(s, d)$  satisfying:  
 $0 \leq s < 2^{32}$ ,  $0 \leq d < 2^{32}$ ,

30 the set of prefixes  $\mathbf{P} = \{P_1, P_2, \dots, P_n\}$  is a partition of the address space  $\mathbf{U}$ ,

each prefix  $P_i$  is a logical rectangle  $R$  in the address space  $\mathbf{U}$  defined by  $[(s_0, d_0), (s_1, d_1)]$ , where  $s_1 - s_0 = s_1 - 2^{i_s} * k_s = 2^{i_s}$  and  $d_1 - d_0 = d_1 - 2^{i_d} * k_d = 2^{i_d}$  for some non negative integers  $i_s, i_d, k_s$ , and  $k_d$ , wherein the logical

rectangle  $R$  is a subset of  $U$  satisfying:  $(s, d) \in R$  if  $s_0 \leq s < s_1$ ,  $d_0 \leq d < d_1$ , wherein  $(s_0, d_0), (s_1, d_1) \in U$ , and the pair of points  $[(s_0, d_0), (s_1, d_1)]$  uniquely defines said rectangle  $R$ ,

5 for each prefix  $P = [(s_0, d_0), (s_1, d_1)] \in \mathbb{P}$ , the point  $(s_0, d_0)$  is a representative of  $P$ , and  $\mathbb{P} = \{p_1, p_2, \dots, p_n\} = \{(s_1, d_1), (s_2, d_2), \dots, (s_n, d_n)\}$  are the set of representatives of the prefixes in  $\mathbb{P}$ , wherein given a point  $(s_d, d_d) \in U$ , for each  $(s, d) \in U$ , wherein  $s_d \geq s$  and  $d_d \geq d$ ,  $(s, d)$  is  
10 dominated by  $(s_d, d_d)$ , and

given a pair of points  $(s_1, d_1), (s_2, d_2) \in U$ , the distance between the points under the norm  $L_\infty$  is given by:

$$\lim_{k \rightarrow \infty} \sqrt[k]{|s_1 - s_2|^k + |d_1 - d_2|^k} = \max(|s_1 - s_2|, |d_1 - d_2|).$$

1/7

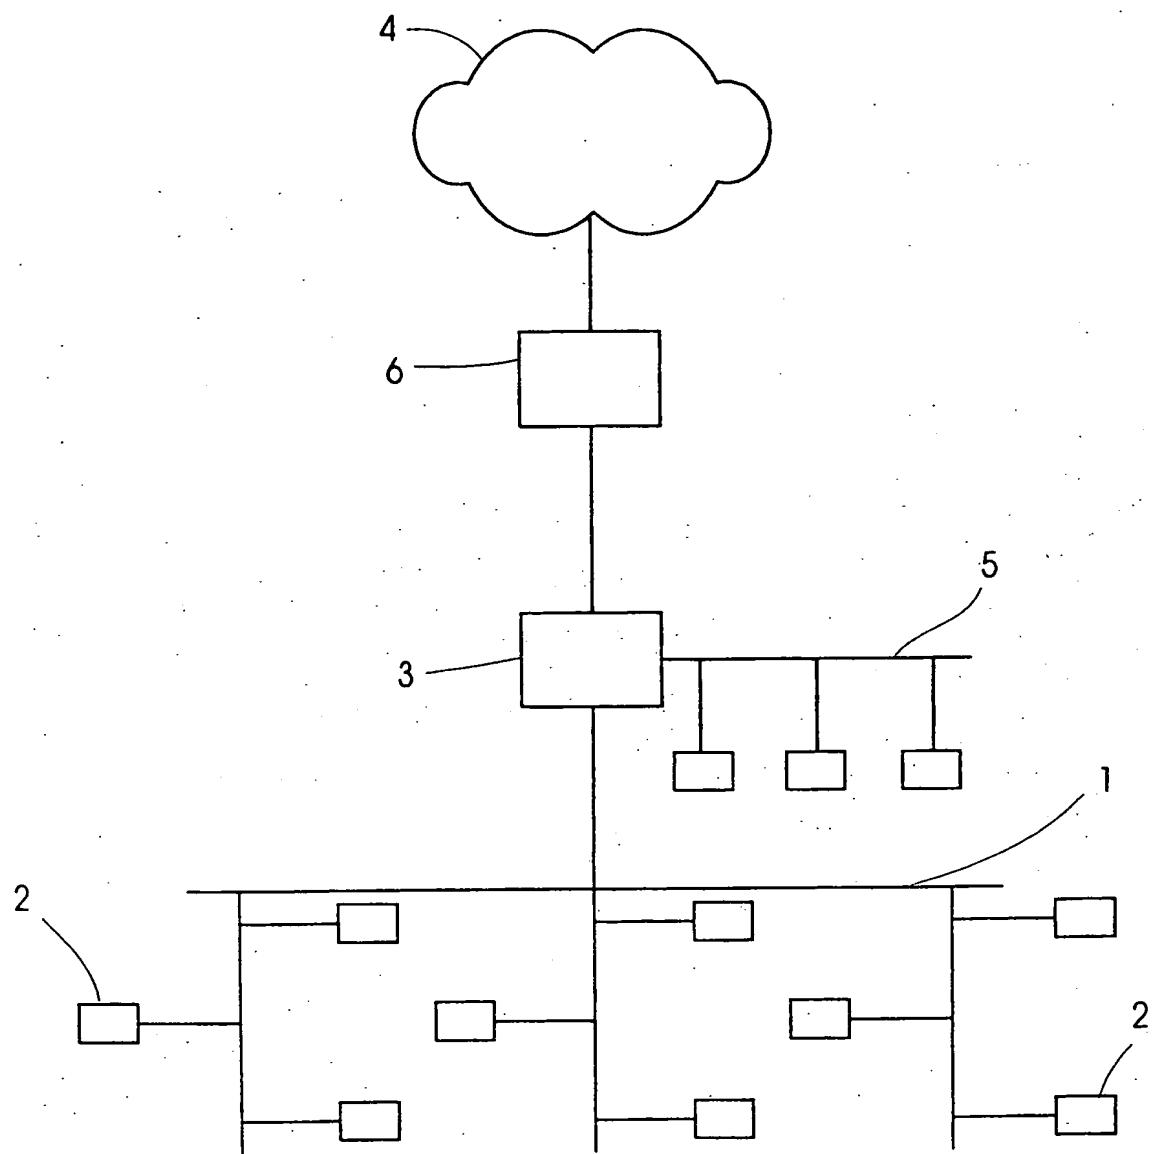


FIG. 1

2/7

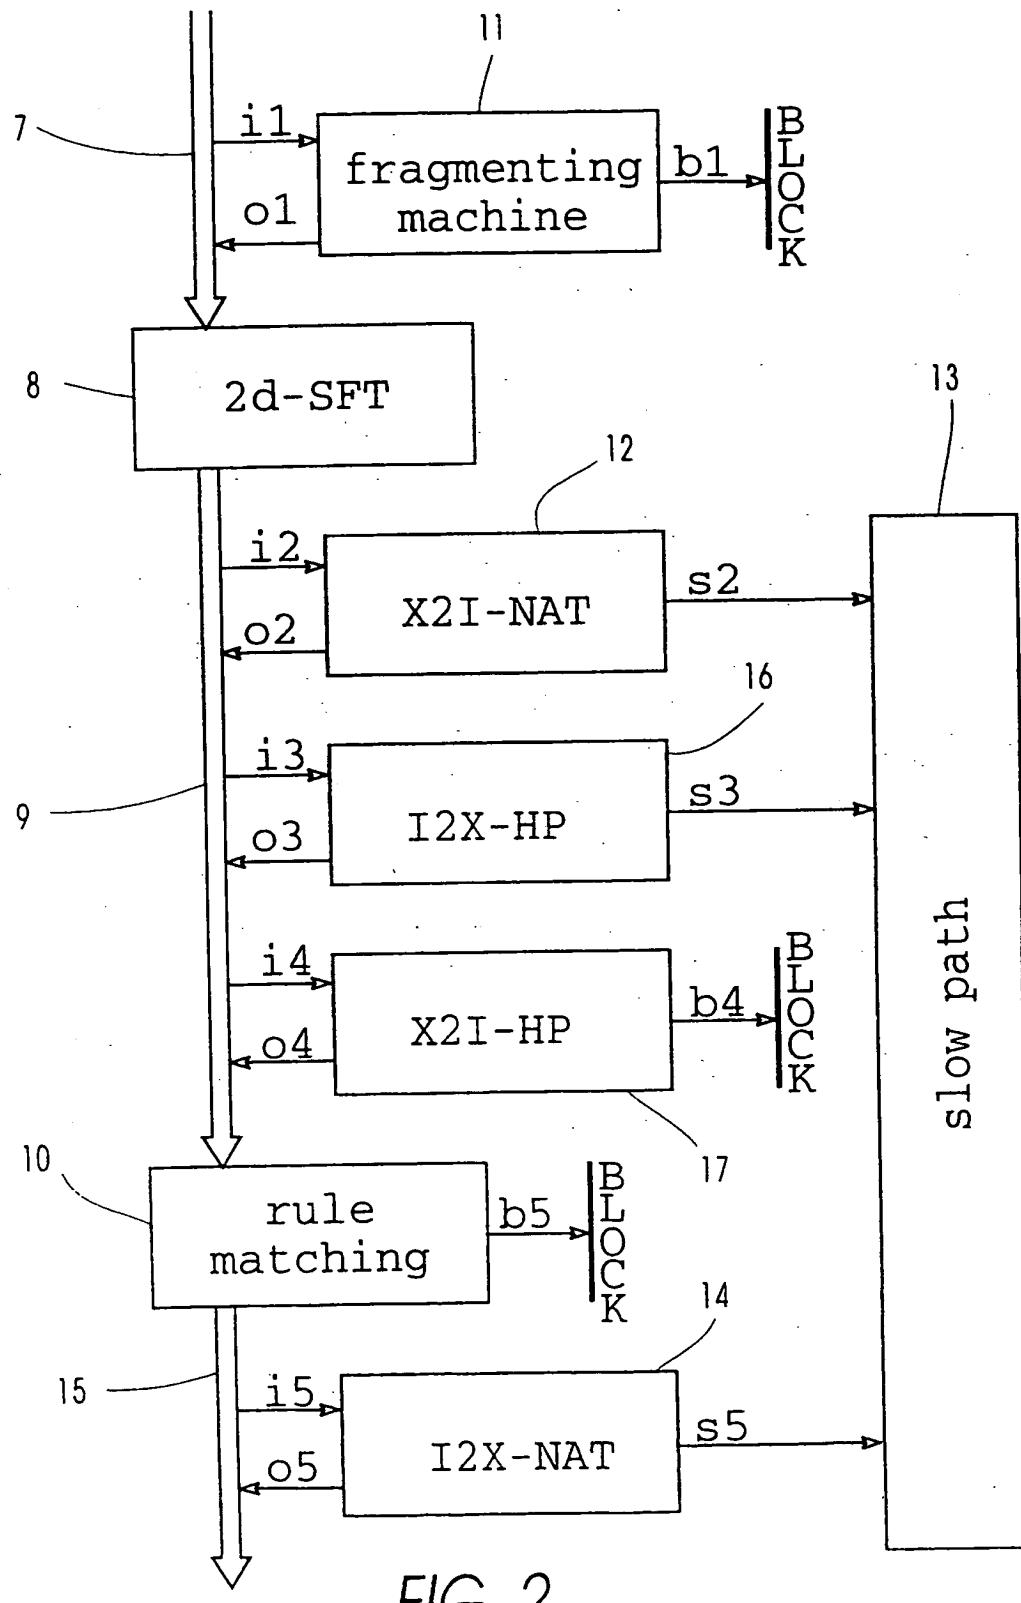


FIG. 2

3/7

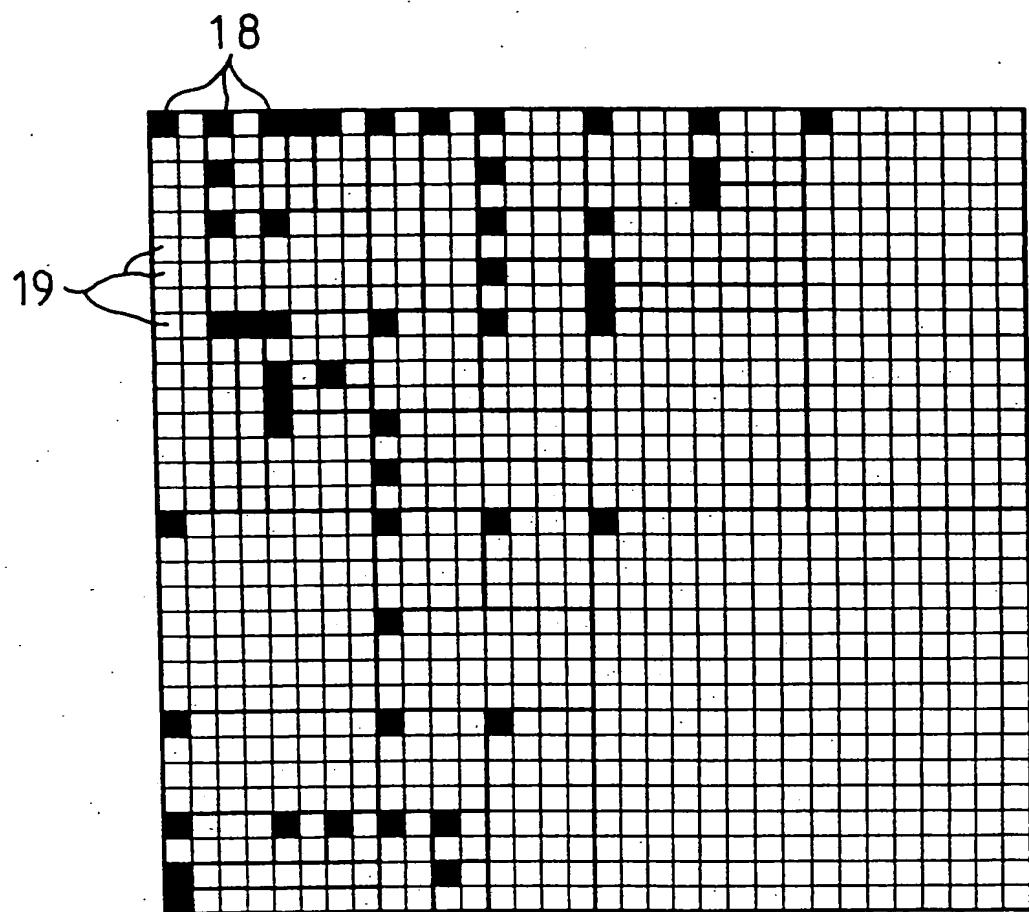


FIG. 3

4/7

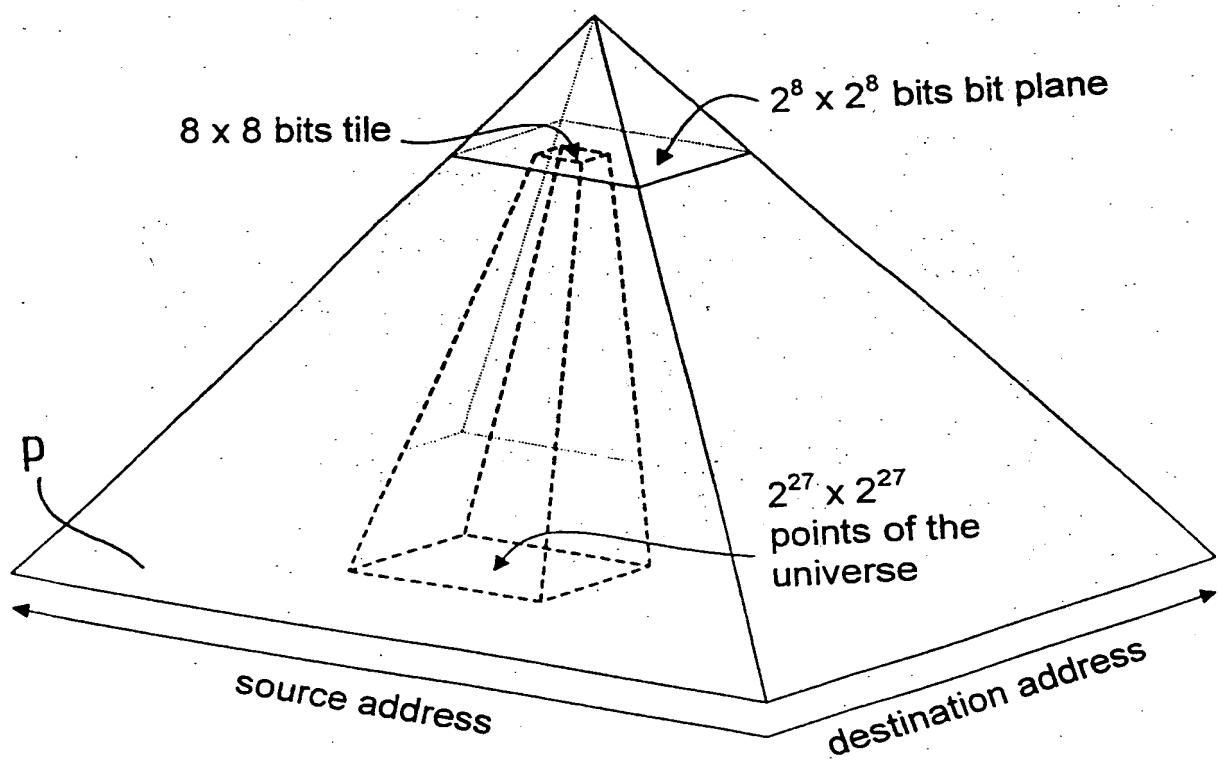


FIG. 4

5/7

0 0 0 0 0 0 0 0  
0 0 0 0 0 0 0 0  
0 0 0 0 0 0 0 0  
0 0 0 0 0 0 0 0  
0 0 0 0 0 0 0 0  
0 0 0 0 0 0 0 0  
0 0 0 0 0 0 0 0  
0 0 0 0 0 0 0 0  
0 0 0 0 0 0 0 0

FIG. 5

1	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0

FIG. 6

1	0	0	0	1	0	0	0
0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0

FIG. 7

1	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0
1	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0

FIG. 8

6/7

1	*	*	*	1	*	*	*
0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0

FIG. 9

1	0	0	0	0	0	0	0
*	0	0	0	0	0	0	0
*	0	0	0	0	0	0	0
*	0	0	0	0	0	0	0
*	0	0	0	0	0	0	0
1	0	0	0	0	0	0	0
*	0	0	0	0	0	0	0
*	0	0	0	0	0	0	0
*	0	0	0	0	0	0	0

FIG. 10

1	*	*	*	1	*	*	*
*	*	*	*	*	*	*	*
*	*	*	*	*	*	*	*
*	*	*	*	*	*	*	*
*	*	*	*	*	*	*	*
1	*	*	*	1	*	*	*
*	*	*	*	*	*	*	*
*	*	*	*	*	*	*	*
*	*	*	*	*	*	*	*

FIG. 11

7/7

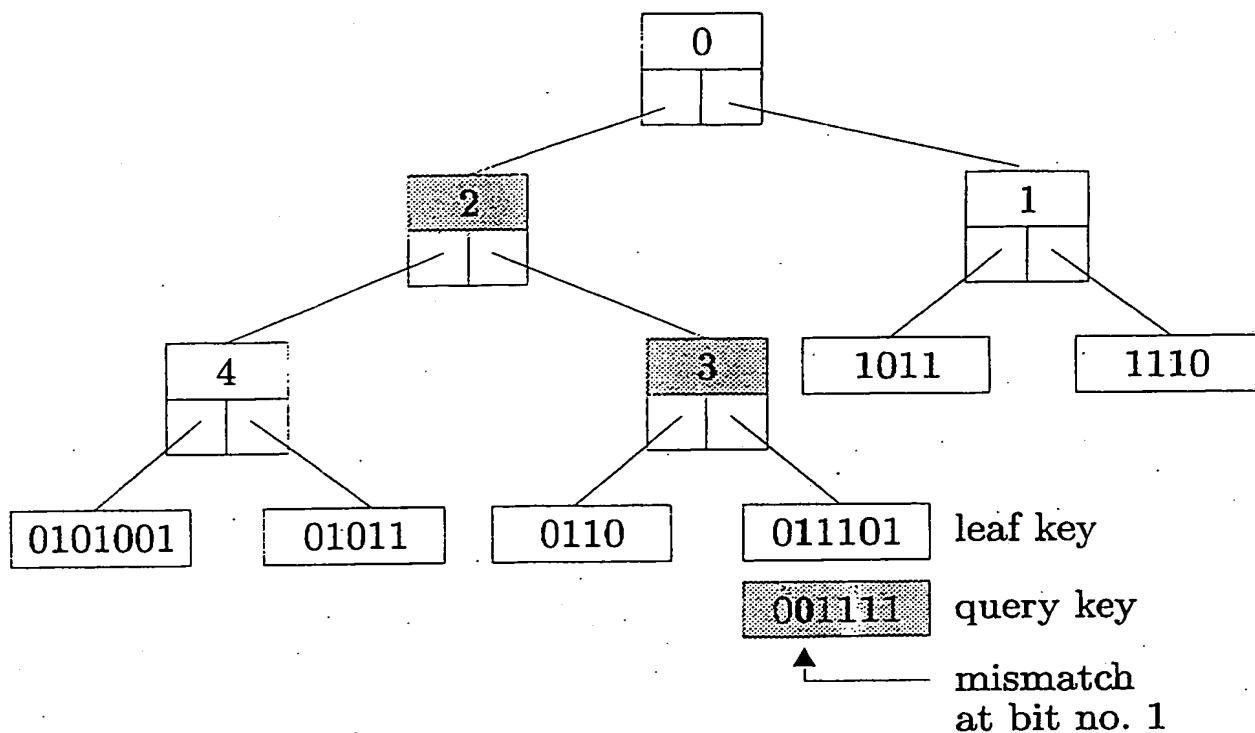


FIG. 12


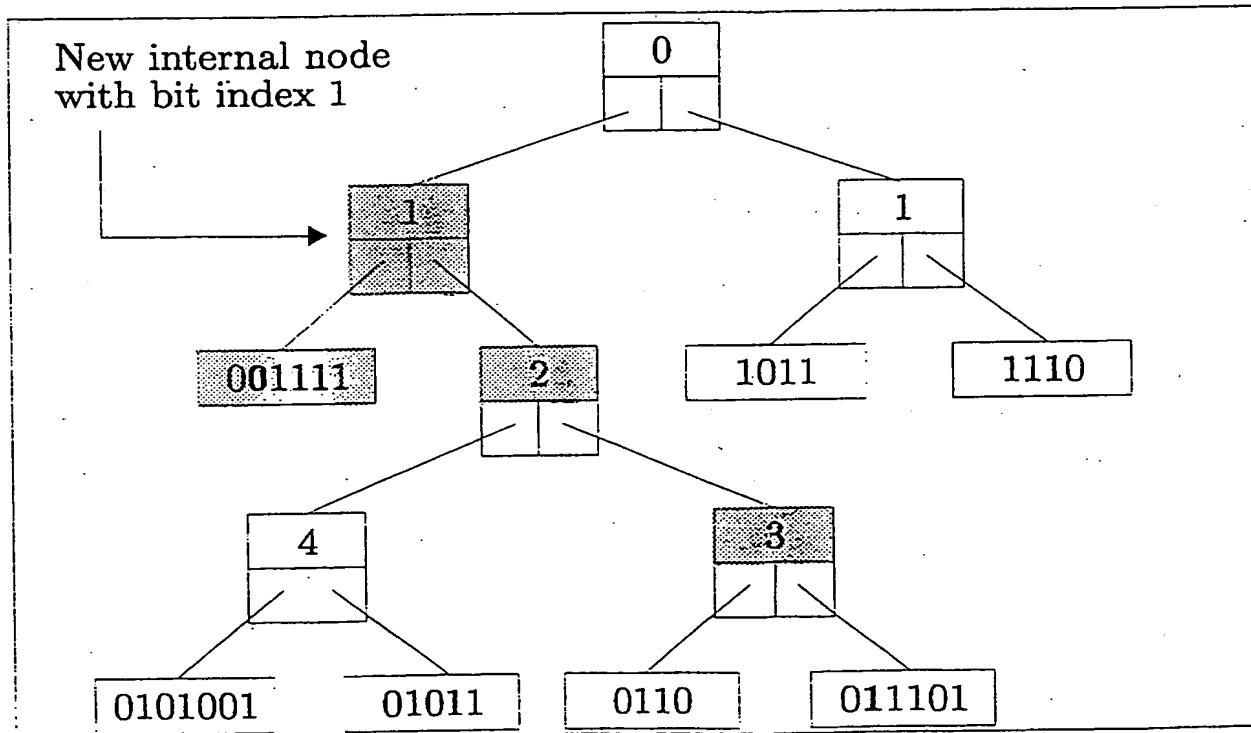


FIG. 13

SUBSTITUTE SHEET (RULE 26)






## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : G06F 17/60, 17/30		A3	(11) International Publication Number: WO 00/02114 (43) International Publication Date: 13 January 2000 (13.01.00)
(21) International Application Number: PCT/SE99/01202			(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
(22) International Filing Date: 2 July 1999 (02.07.99)			
(30) Priority Data: 9802415-1 2 July 1998 (02.07.98) SE			
(71) Applicant (for all designated States except US): EFFNET GROUP AB [SE/SE]; Gustavslundsvägen 151 B, S-167 51 Bromma (SE).			
(72) Inventors; and			
(75) Inventors/Applicants (for US only): SUNDSTRÖM, Mikael [SE/SE]; Södra Kungsgatan 24, S-972 35 Luleå (SE). JOHANSSON, Olof [US/US]; 10 B Queen Circle, Newark, DE 19702 (US). LINDHOLM, Joel [SE/SE]; Kårhusvägen 5:407, S-977 54 Luleå (SE). BRODNIK, Andrej [SI/SI]; Gotska 6, 1000 Ljubljana (SI). CARLSSON, Svante [SE/SE]; Gnejsstigen 4, S-977 53 Luleå (SE).			
(74) Agents: PETRI, Stellan et al.; Ström & Gulliksson AB, P.O. Box 4188, S-203 13 Malmö (SE).			

(54) Title: FIREWALL APPARATUS AND METHOD OF CONTROLLING NETWORK DATA PACKET TRAFFIC BETWEEN INTERNAL AND EXTERNAL NETWORKS

(57) Abstract

A firewall (3) for controlling network data packet traffic between internal and external networks (1, 5, 4), comprising filtering means selecting from a total set of rules, in dependence of the contents in data fields of a data packet being transmitted between said networks, a rule applicable to the data packet, in order to block said packet or forward said packet through the firewall (3). A 2-dimensional address lookup means (8) performs a 2-dimensional lookup of the source and destination addresses of the packet in a set of address prefixes, each prefix having a subset of rules of the total set of rules, in order to find a prefix, via its representation, associated with said source and destination addresses, and rule matching means (10) for rule matching, on the basis of the contents of said data fields, in order to find the rule applicable to the data packet.

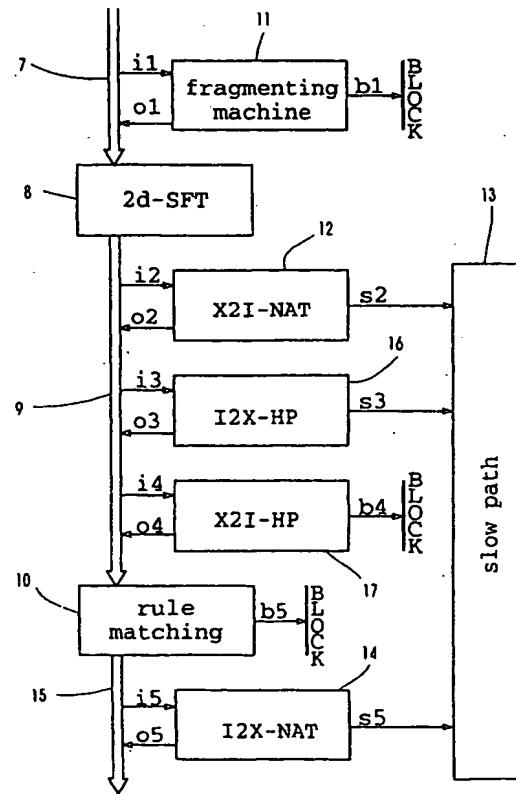

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 99/01202

## A. CLASSIFICATION OF SUBJECT MATTER

IPC7: G06F 17/60, G06F 17/30

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: G06F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P, X	WO 9828690 A1 (LIVINGSTON ENTERPRISES, INC.), 2 July 1998 (02.07.98), page 8, line 24 - page 11, line 7 --	1,11
A	WO 9700471 A2 (CHECK POINT SOFTWARE TECHNOLOGIES LTD), 3 January 1997 (03.01.97) --	1-9,11-17, 19,20
A	WO 9729413 A2 (SECURE COMPUTING CORPORATION), 14 August 1997 (14.08.97) --	1-9,11-17, 19,20
A	US 5606668 A (GIL SHWED), 25 February 1997 (25.02.97) --	1-9,11-17, 19,20

 Further documents are listed in the continuation of Box C. See patent family annex.

- \* Special categories of cited documents:
- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "I" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed
- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- "&" document member of the same patent family

Date of the actual completion of the international search

15 December 1999

Date of mailing of the international search report

21-12-1999

Name and mailing address of the ISA/  
Swedish Patent Office  
Box 5055, S-102 42 STOCKHOLM  
Facsimile No. + 46 8 666 02 86Authorized officer  
Sylvain Dunand/cs  
Telephone No. + 46 8 782 25 00

## INTERNATIONAL SEARCH REPORT

2

International application No.  
PCT/SE 99/01202

## C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0594196 A1 (DIGITAL EQUIPMENT CORPORATION), 22 October 1993 (22.10.93) --	1-9, 11-17, 19, 20
Y	US 5757924 A (AHARON FRIEDMAN ET AL), 26 May 1998 (26.05.98) --	10, 18
Y	"The new internet protocol (Internet Engineering Task Force's IPv6 will replace 32-bit addresses with 128-bit addresses)", Carl-Mitchell, Smoot, UNIX Review, v13, n7, page 31(16), June 1995. --	10, 18
Y	Proceedings of the Seventeenth Annual ACM Symposium on Principles of Distributed Computing, "Reconsidering Fragmentation and Reassembly", Girish P. Chandranmenon et al, Puerto Vallarta, México, June 28 - July 2 1998. -----	10, 18

**INTERNATIONAL SEARCH REPORT**  
Information on patent family members

02/12/99

International application No.	
PCT/SE 99/01202	

Patent document cited in search report	Publication date	Patent family member(s)		Publication date
WO 9828690 A1	02/07/98	AU 5712198 A US 5889958 A		17/07/98 30/03/99
WO 9700471 A2	03/01/97	AU 6135696 A CA 2197548 A EP 0807347 A JP 10504168 T NO 970611 A US 5835726 A CA 2138058 A EP 0658837 A JP 8044642 A US 5606668 A		15/01/97 03/01/97 19/11/97 14/04/98 15/04/97 10/11/98 16/06/95 21/06/95 16/02/96 25/02/97
WO 9729413 A2	14/08/97	AU 5548496 A US 5918018 A		28/08/97 29/06/99
US 5606668 A	25/02/97	CA 2138058 A EP 0658837 A JP 8044642 A US 5835726 A WO 9700471 A		16/06/95 21/06/95 16/02/96 10/11/98 03/01/97
EP 0594196 A1	22/10/93	DE 69324204 D US 5414704 A		00/00/00 09/05/95
US 5757924 A	26/05/98	AU 7154896 A CA 2211301 A CN 1173256 A EP 0872074 A WO 9713340 A		28/04/97 10/04/97 11/02/98 21/10/98 10/04/97

THIS PAGE BLANK (USP10)